


PVC-PLINTH PROFILES TECHNICAL DATA SHEET 1/2

1 PRODUCT DESCRIPTION

PVC plinth profile are decoration products that match with different kitchen styles. Manufactured in PVC and coated in aluminium and different PVC foils models are ideal for modern kitchens. Plinths are offered with stands and clips that make them easy to mount and install.

2 MODELS

Mobelpro plinth profiles are available in 3 widths 10 cm, 12 cm or 15 cm (one or two channels), to give a touch of style to the design of any kitchen.

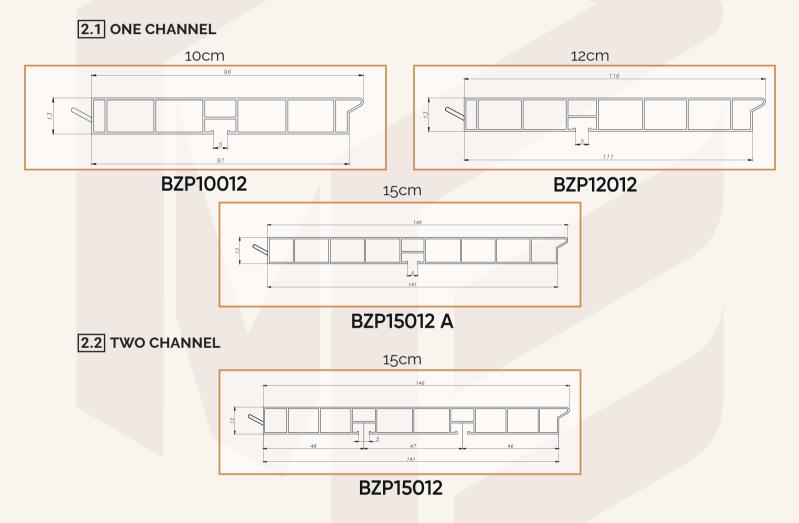

Our plinth profiles have a flexible and transparent extension attached to the bottom of it that creates a barrier against moisture and dirt that prevents the passage of water or liquid to the internal part of the kitchen.

3 PRODUCT PROPERTIES

- $\overline{\checkmark}$ Plinth profile easily fitted with standard hole pattern for fastening to the kitchen lower base.
- ✓ Plug-in profile easily inserted through precise opening in basic profile
- ✓ UV- and weather resistant, alkali-resistant and nondisplaceable
- ✓ Made of impact resistant hard PVC



CENTRAL OFFICE Barbaros Mh. Ak Zambak Sk. Varyap Meridian Apt.: 131/A Ataşehir/İstanbul

FACTORIES

Corganik Cad. No:11 KOSB Tuzla/İstanbul
Ze Melek Aras Bul. Tuna Cad. No:10 KOSB Tuzla/İstanbul
Analitik Cad. No:59 KOSB Tuzla/İstanbul

CONTACT info@mobelkant.com +90 (216) 527 89 79 - 365 54 15 www.mobelkant.com



PVC-PLINTH PROFILES TECHNICAL DATA SHEET 2/2

4 MAIN CHARACTERISTICS

Viscosity Index	ISO 1628-2	112ml/g.
K-value	ISO 1628-2	67
Apparent Density	ISO 60	0,570 g/cm3
Volatiles	ISO 1269	<0,3 %

5 APPLICATION INSTRUCTIONS

• Fasten the plinth base profile horizontally to the kitchen legs using suitable anchors.

• The spacing between the profiles should be 2 mm.

• Form the corners with a mitre cut.

6 CODING & PACKNG

BZP10012 (Standard)	15 pcs per box
BZP12012 (Standard)	15 pcs per box
BZP15012 (Standard)	15 pcs per box
BZP15012A - Two Chanels (Standard)	15 pcs per box

7 STORAGE

Keep in a dry place and store lying down. Avoid bending during transport. Plinths should not be stored under direct sunlight or in extreme temperatures. Avoiding these extreme conditions, the edge can be stored for a long time with no change to its properties. However, it is important that the material should rest for at least one day at room temperature prior to processing.

8 CLEANING

Plinths easy to clean using commercially available cleaning agents suitable for plastic surfaces. The use of solvent or alcohol-based substances should be avoided as they could partially dissolve the surface.

9 HAZARDS INFO

PVC Edge does not contain any materials hazardous to health that can be emitted during processing or storage. The material is suitable for recycling; however it is not suitable for incineration

10 IMPORTANT FEATURES:

- They are not combustible.
- They are 100% recyclable.
- Plinths are coated with Aluminum and PVC foils.
- · High resistance to abrasion, wear and stains.
- PVC coated ones hey contain surface lacquers that ensure durability in the shades of the colors.



CENTRAL OFFICE Barbaros Mh. Ak Zambak Sk. Varyap Meridian Apt.: 131/A Ataşehir/İstanbul

FACTORIES

Organik Cad. No:11 KOSB Tuzla/İstanbul
Melek Aras Bul. Tuna Cad. No:10 KOSB Tuzla/İstanbul
Analitik Cad. No:59 KOSB Tuzla/İstanbul

CONTACT

info@mobelkant.com +90 (216) 527 89 79 - 365 54 15 www.mobelkant.com